

CleanRoom SOLUTION



SD420Si

M-SD420Si

廣隆欣業股份有限公司

最好的服務品質



SINCE 1993

本體結構 SUS430 & SUS304


電源供應 AC 1Ø 220V 50/60Hz

馬達類型 EC 無刷變頻馬達


HEPA 特性

鋁框,捕集效率:99.99% at 0.3um

(選配濾網:ULPA 99.999% at 0.1~0.12um)

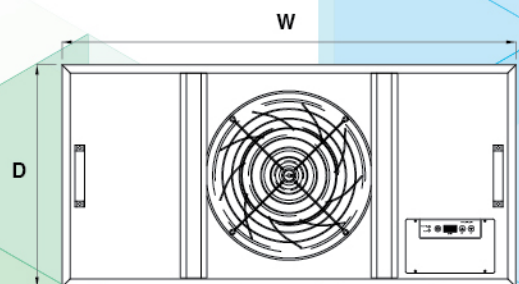

▲ SD420Si

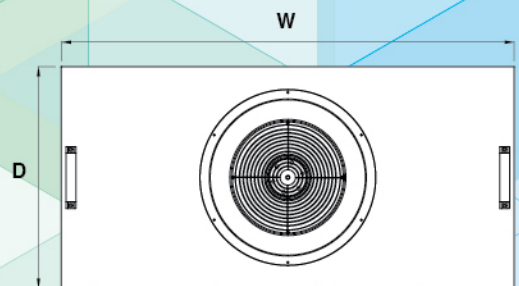

▲ M-SD420Si

FFU EC Standard Type

項目	SD420Si	SD430Si	SD525i	SD440Si
外部尺寸 (mm)	W1175*D575*H350	W1173*D873*H350	W1473*D723*H350	W1175*D1175*H350
HEPA 尺寸 (mm)	1170*570*50	1170*870*50	1470*720*50	1170*1170*50
風速 (m/s)	0.35 ~ 0.5	0.35 ~ 0.5	0.35 ~ 0.5	0.35 ~ 0.5
風量 (cmm)	15 ~ 20	23 ~ 30	23 ~ 30	30 ~ 40
電流 (A)	0.28 ~ 0.44	0.37 ~ 0.66	0.37 ~ 0.66	0.59 ~ 0.98
消耗電力 (W)	60 ~ 95	80 ~ 145	80 ~ 145	115 ~ 210
重量 (kg)	28	33.5	36	45.5

FFU EC Thin Type

項目	M-SD220Si	M-SD320Si	MS-D420Si	M-SD430Si	M-SD440S
外部尺寸 (mm)	W573*D573*H200	W918*D573*H200	W1173*D573*H200	W1173*D873*H200	W1173*D1173*H200
HEPA 尺寸 (mm)	570*570*50	915*570*50	1170*570*50	1170*870*50	1170*1170*50
風速 (m/s)	0.35 ~ 0.5	0.35 ~ 0.5	0.35 ~ 0.5	0.35 ~ 0.5	0.35 ~ 0.5
風量 (cmm)	7 ~ 10	12 ~ 16	15 ~ 20	23 ~ 30	30 ~ 40
消耗電力 (W)	45 ~ 60	60 ~ 90	80 ~ 120	100 ~ 170	150 ~ 240
重量 (kg)	16	18	20	35	39.5



廣隆欣業股份有限公司

41353 台中市霧峰區四德路280巷25號

Tel: +886-4-23310802 Fax: +886-4-23310809 E-Mail: deviser@acdt.com.tw



Website